


C10, Central Section, China Ceramics Industry Headquarters  
No.68, West Ji Hua Road, Foshan City  
[www.casaferra.com.cn](http://www.casaferra.com.cn)  
TEL:0757-8533 9907



Every appearance of **Casaferra**<sup>®</sup>  
can make you feel the elegance of life

**Casaferra**<sup>®</sup>



翡翠的每一次出现都让你感受到生活的高雅

*Every appearance of Casaferra can make you feel the elegance of life*





Original NA03  
Floor / 200X1200mm/8"x48"

**NA**="Elegance"  
the refined essence

The uniform texture and the absence knots in the NA explores oak's finest spirit.  
NA reproduces the appearance of polished, oiled wood: the contrast between  
the matte veins and the bright, slightly glossy background enhances the three-dimensionality  
of the planed effect. So, It's full of elegance, and can be used in every different space.

## Italian Natural Oak



Bianco NA01



Grigio NA04



Beige NA02



Original NA03



Walnut NA05



Nero NA09

### FEATURES

- Micro-Engraving Technology
- HD
- Easy to Maintain

### APPLICATION

- Wall Tile
- Floor Tile
- Residential
- Commercial
- Public

### SURFACE

- Matt

200X1200mm / 8"x48"

6 1 1  
Colors Size Surface



## Italian Natural Oak

NA(natural) is a tribute to Italian oak of the finest quality with its natural nuances and slender veins, it faithfully reproduces the wood's essence with extraordinary fidelity of details and colors. The uniform texture and the absence of knots explores oak's finest spirit and the contrast between the matte veins and the bright, slightly glossy background enhances the three-dimensionality of the planed effect.

No modern floor should be without it. It is where Natural meets Urban: the timeless appeal of oak aged-look surfaces and settings immersing in nature.



### Italian Natural Oak

Bianco NA01

200x1200mm / 8" X 48"  
24 Different Faces



Bianco NA01  
Floor / 200X1200mm/8" x 48"



Beige NA02  
Floor / 200X1200mm/8" x 48"

### Italian Natural Oak

Beige NA02

200x1200mm / 8" X 48"  
24 Different Faces





**Original NA03**  
Floor / 200X1200mm/8"x48"

**Italian Natural Oak**  
**Original**



**Original NA03**  
Floor / 200X1200mm/8" x 48"



**Italian Natural Oak**  
Original NA03

200x1200mm / 8" X 48"  
24 Different Faces



**Grigio NA04**  
Floor / 200X1200mm/8" x 48"



**Italian Natural Oak**  
Grigio NA04

200x1200mm / 8" X 48"  
24 Different Faces



**Grigio NA04**  
Floor / 200X1200mm/8"x48"



Italian Natural Oak  
**Grigio**



**Walnut NA05**  
Floor / 200X1200mm/8" x 48"




**Italian Natural Oak**  
Walnut NA05

200x1200mm / 8" X 48"  
24 Different Faces



**Italian Natural Oak**  
Nero NA09

200x1200mm / 8" X 48"  
24 Different Faces

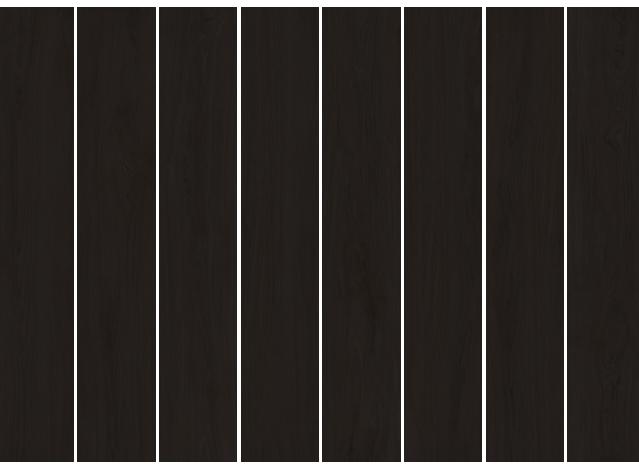



Bianco NA01



Grigio NA04



Beige NA02



Walnut NA05



Original NA03




Nero NA09


# Laying Proposals

▼  
2mm  
▲


Before laying, it is recommended to check the color number, size and so on, in order to achieve better results; it is suggested that the special joint mixture of Casaferra tile be used for all products of Casaferra tile; There shall be a seam for paving, and it is suggested that Casaferra's products have a 2mm.

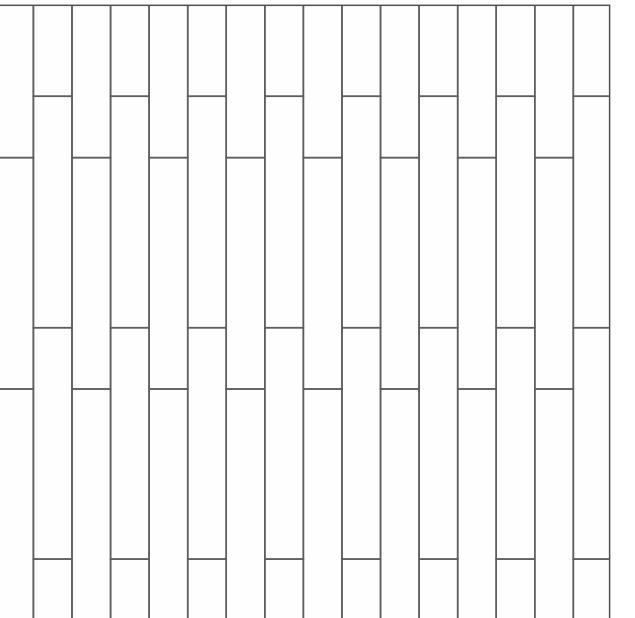


a.

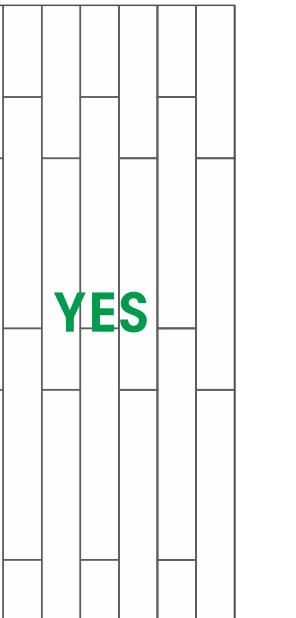


b.

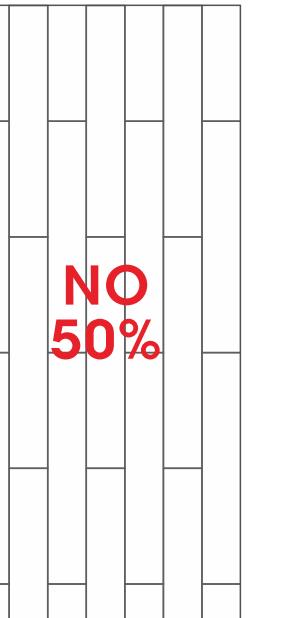

c.

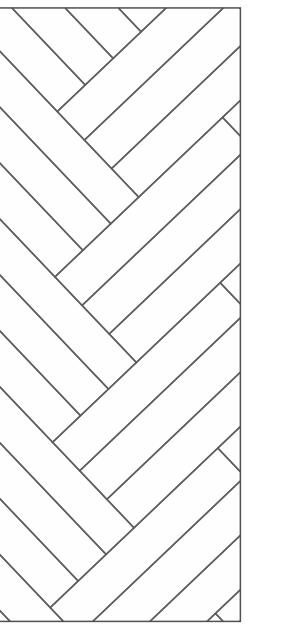

d.

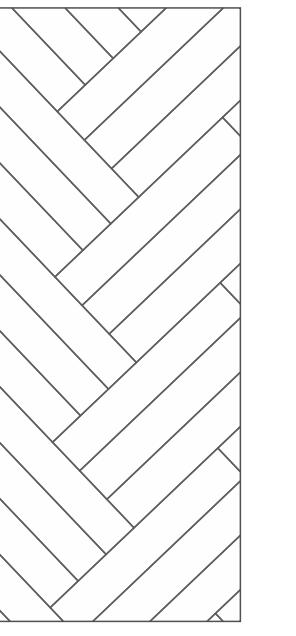

e.

YES

NO  
50%

## Technical Performance

MEASUREMENT AND SURFACE APPEARANCE	TEST METHOD	INTERNATIONAL STANDARDS	Casaferra VALUE
	LENGTH	ISO 10545-2	±0.6%, ±2.0mm ±0.1%, ±1.0mm
	WIDTH	ISO 10545-2	±0.6%, ±2.0mm ±0.1%, ±1.0mm
	THICKNESS	ISO 10545-2	±5%, ±0.5mm ±1%, ±0.3mm
	SURFACE FLATNESS	ISO 10545-2	±0.5%, ±2.0mm ±0.5%, ±2.0mm
	STRAIGHTNESS OF SIDES	ISO 10545-2	±0.5%, ±1.5mm ±0.02%, ±0.1mm
	RECTANGULARITY	ISO 10545-2	±0.5%, ±2.0mm ±0.1%, ±1.0mm
	WATER ABSORPTION	ISO 10545-3	E <sub>b</sub> ≤0.5% Individual maximum 0.6% Individual maximum 0.6%
	BREAKING STRENGTH	ISO 10545-4	≥1300N ≥1300N
	MODULUS OF RUPTURE	ISO 10545-4	Minimum 35 Individual minimum 32 Individual minimum 32
	STAIN RESISTANCE	ISO 10545-14	Minimum Class 3 Class 5 Livello 5 Clase 5
	ABRASION RESISTANCE	ISO 10545-7	Report abrasion class Report cycles passed 1500
	FROST RESISTANCE	ISO 10545-12	Required Pass
	CRAZING RESISTANCE	ISO 10545-11	Required Pass
	SLIP RESISTANCE	DIN 51097 GB/T 4100-2015 Appendix M	Class A, B and C Matt Class B μ≥0.5 Static friction coefficient of floor tile ≥0.5

## Packing Information

Casaferra®						
FORMAT(mm/in)	PCS/BOX	SQM/BOX	KG/BOX	BOX/PALLET	SQM/PALLET	KG/PALLET
200x1200mm 8"x48"	6	1.44	34	33	47.52	1137